


MG POWER DIESEL GENERATOR Cummins® powered Genset Model:MGC 68

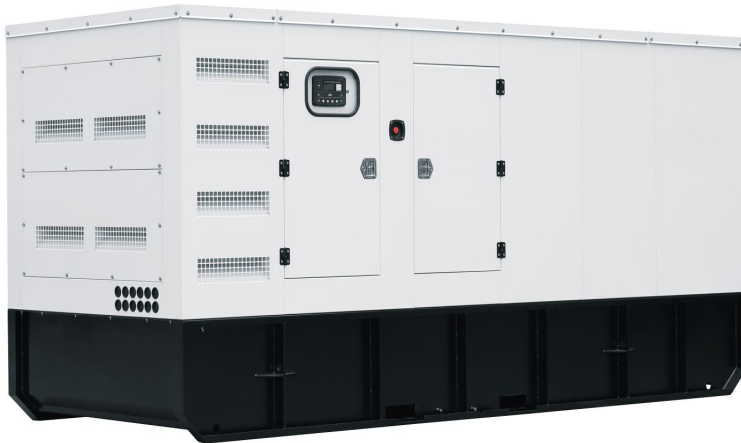

*Drawing above for illustration purposes only

I. GENERAL DATA

Prime Power	kW/kVA	68	85
Standby Power	kW/kVA	75	94
Frequency	Hz/rpm	50	1500
Voltage	V	400	230
Current	A	123	
Connection	/	3P 4W/Y	
Rated Power Factor	/	0.8	
Open Type (LxWxH)	mm	2300x900x1480	
Open Type(Weight)	kg	1100	
Silent Type (LxWxH)	mm	2800x1100x1470	
Silent Type(Weight)	kg	1550	



■ Available for voltages 400/230V, 480/277V, 380/220V, 440/254V, 416/240V, 220/127V, 208/120V

■ All datas based on ISO 3046, altitude 100m (328ft), barometric pressure 100kPa (29.53inHg), air temperature 25°C (77°F), relative humidity 30%.

■ Please contact with YANAN engineer for correct generator capacity selection when the load application can't meet with the standard reference.

■ YANAN diesel generators comply with standards:ISO8528,ISO14000,ISO3046,GB755,BS5000,VDE0530,IEC34-1

II. STANDARD CONFIGURATION

Engine	Cummins, including air filters, fuel filters, oil filter, starting motor and charging alternator etc.
Alternator	YANAN brushless AC alternator
Radiator	50°C, fan protective shroud
Base Frame	<p>≤550KW: base mounted fuel tank, anti-vibration pads, battery holder</p> <p>>550KW: channel steel base frame, anti-vibration pads, battery holder</p>
Circuit Breaker	<p>≤63A: Micro Circuit Breaker (MCB) >63A ≤1250A : Molded case circuit breaker(MCCB) ,</p> <p>>1250A: Air circuit breaker(ACB)</p>
Control System	DEEP SEA 6120
Start Battery	Dry charged battery, available for 6 times starts under standard condition; connection cables.
Installation Accessories	Bellow, Elbow and flange, Exhaust silencer, etc.
Documents	Electric drawing, operation & maintenance manual, certification etc.

III. OPTIONAL CONFIGURATION

Engine Accessories	<input type="checkbox"/> Heavy-duty air filter <input type="checkbox"/> Coolant heater <input type="checkbox"/> Lub oil heater <input type="checkbox"/> Fuel and Water Separator
Alternator And Accessories	<input type="checkbox"/> Stamford <input type="checkbox"/> Leroy Somer <input type="checkbox"/> Marathon <input type="checkbox"/> Anti condensation heater <input type="checkbox"/> PMG <input type="checkbox"/> High voltage ____ kV
Cooling System	<input type="checkbox"/> 50°C radiator <input type="checkbox"/> Heat exchanger + water cooling tower + External water circulation pumping system <input type="checkbox"/> Remote horizontal water tank system
Control System	<input type="checkbox"/> AMF <input type="checkbox"/> Parallel <input type="checkbox"/> Practical type in low temperature environment <input type="checkbox"/> Control Screen Heater <input type="checkbox"/> Other (Comap、DEIF)
Circuit Breaker	<input type="checkbox"/> 3/4 poles <input type="checkbox"/> Fixed/handcart type <input type="checkbox"/> Electric mechanism
Automatic Transfer Swtich	<input type="checkbox"/> ATS cabinet
Start Battery	<input type="checkbox"/> Nickel-cadmium battery <input type="checkbox"/> Maintenance-free battery <input type="checkbox"/> Power charger and selector <input type="checkbox"/> Charging current meter
External Fuel Tank	<input type="checkbox"/> 500L <input type="checkbox"/> 1000L <input type="checkbox"/> 1500L <input type="checkbox"/> 2000L <input type="checkbox"/> 2500L <input type="checkbox"/> 3000L <input type="checkbox"/> 4000L <input type="checkbox"/> 5000L
Others	_____

IV. ENGINE DATA

Engine Model	6BT5.9-G2	Engine Power	92	kW
Aspiration	Turbocharged	Displacement	5.9	L
Type	In-line	Bore×Stroke	102×120	mm
No. of Cylinders	6	Compression Ratio	17.3:1	
Governor Type	Electronic Governor	Rated Speed	1500	RPM

■ Fuel System

Prime Power Fuel Consumption	22.3	L/h	Standby Power Fuel Consumption	23.6	L/h
Fuel #	ASTM D975 No.2-D or BS2869 1998 Class A1, A2		Injection System	BYC A	

■ Lubrication System

Lub Oil Capacity	16.4	L			
Lub #	API CF-4 15W40		Max. Temperature	121	°C

■ Coolant System

Coolant Capacity	22.4	L	Max. Top Tank Temp.	104	°C
Std. Thermostat (Modulating) Range	82-95	°C	Fan Drive Method	Shaft drive	
Cooling Fan Air Flow	240	m ³ /min			

■ Air Intake System

Combustion Air Flow	6/6.48	m ³ /min	Maximum Air Intake Restriction	3.7	kPa
---------------------	--------	---------------------	--------------------------------	-----	-----

■ Exhaust System

Exhaust Gas Flow	15/16.8	m ³ /min	Max. Back Pressure	10	kPa
Exhaust Gas Temp	≤565	°C	Exhaust Pipe Size	φ76	mm

■ Starting System

Start Mode	DC24V Electric start	Battery	2×120	Ah
------------	----------------------	---------	-------	----

V. ALTERNATOR DATA

Alternator Model	SLG224G	Rate Power	68/85	kW/kVA
PF.	0.8	Voltage	400/230	V
Phase	3	Frequency	50	Hz
Connection	3P 4W/Y	Bearing	1	
Winding Pitch	2/3	Proteccion Class	IP23	
Insulation Class	H	Efficiency	90.2%	
Tel. Influence	TIF: <50	Voltage Regulation	±1.0%	
Harmonic Coefficient	THF: <2%	AVR	AS440	
Voltage Adjust Scope	≥±5%	Excitation System	Self Excited	

VI. CONTROL SYSTEM DATA

MODEL DSE6120

■ Main feature

Electronic J1939 (CAN) and nonelectronic MPU and alternator sensing engine support for diesel, gas and petrol engines all in one variant.

With a number of flexible inputs, outputs and protections, the modules can be easily adapted to suit a wide range of applications.



DSE6120 MKIII

■ Key Function

- ▲ Utility voltage sensing
- ▲ Generator/load power monitoring (kW, kV A, kV Ar, pf)
- ▲ Generator overload protection (kW)
- ▲ Efficient power save mode
- ▲ mains and generator closed via front panel
- ▲ 4 configurable DC outputs
- ▲ 4 configurable analog./digital inputs
- ▲ 6 configurable digital inputs
- ▲ Support for 0-10 V & 4-20 mA oil pressure sensors
- ▲ Configurable staged loading outputs
- ▲ CAN, MPU and alternator speed sensing in one variant
- ▲ 3 engine maintenance alarms
- ▲ Engine speed protection
- ▲ Engine pre-heat
- ▲ Multiple date and time scheduler
- ▲ Engine idle control for starting & stopping
- ▲ Fuel pump control
- ▲ Battery voltage monitoring
- ▲ Start on low battery voltage
- ▲ Configurable remote start input
- ▲ Alternative configuration
- ▲ Alarm including common alarm, common electric and common shutdown
- ▲ LCD and LED alarm indication
- ▲ Configurable event log (50)
- ▲ Heated display option available

☆ *For more information, please visit the [official website](#)*

VII. WARRANTY POLICY

1. Guarantee for one year or 1000 hours (accord to whichever reach first) from ex-factory date. Refer to

《YANAN Diesel Generator Warranty Manual》 for more details.

2. Wearing parts (filters), incorrect man-made operation, maintenance failures are excluded from the warranty policy

VIII. DRAWING (for illustration purposes only)

