


### MG POWER DIESEL GENERATOR Cummins® powered Genset Model:MGC 200

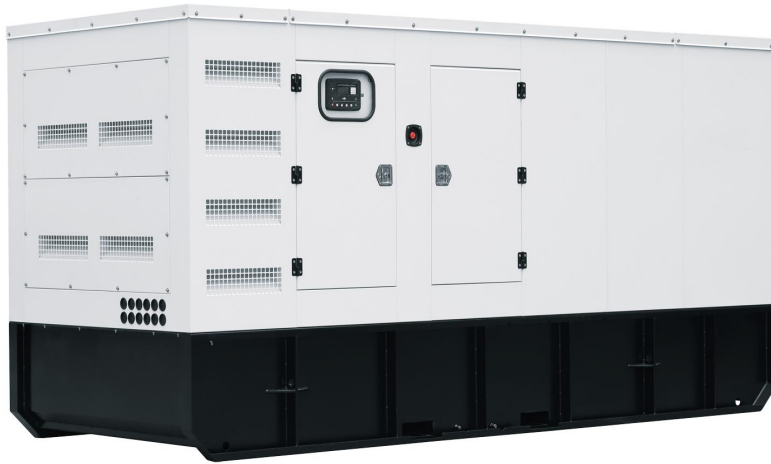

\*Drawing above for illustration purposes only

#### I . GENERAL DATA

Prime Power	kW/kVA	200	250
Standby Power	kW/kVA	220	275
Frequency	Hz/rpm	50	1500
Voltage	V	400	230
Current	A	361	
Connection	/	3P 4W/Y	
Rated Power Factor	/	0.8	
Open Type (L×W×H)	mm	3000×1100×1920	
Open Type(Weight)	kg	2600	
Silent Type (L×W×H)	mm	4200×1500×2100	
Silent Type(Weight)	kg	3700	



■ Available for voltages 400/230V, 480/277V, 380/220V, 440/254V, 416/240V, 220/127V, 208/120V

■ All datas based on ISO 3046, altitude 100m (328ft), barometric pressure 100kPa (29.53inHg), air temperature 25°C (77°F), relative humidity 30%.

■ Please contact with YANAN engineer for correct generator capacity selection when the load application can't meet with the standard reference.

■ YANAN diesel generators comply with standards:ISO8528,ISO14000,ISO3046,GB755,BS5000,VDE0530,IEC34-1

### II. STANDARD CONFIGURATION

Engine	Cummins, including air filters, fuel filters, oil filter, starting motor and charging alternator etc.
Alternator	YANAN brushless AC alternator
Radiator	Silent Type 50°C (Open Type 40°C) , fan protective shroud
Base Frame	≤550KW: base mounted fuel tank, anti-vibration pads, battery holder
	>550KW: channel steel base frame, anti-vibration pads, battery holder
Circuit Breaker	≤63A: Micro Circuit Breaker (MCB) >63A ≤1250A : Molded case circuit breaker(MCCB) , >1250A: Air circuit breaker(ACB)
Control System	DEEP SEA 6120
Start Battery	Dry charged battery, available for 6 times starts under standard condition; connection cables.
Installation Accessories	Bellow, Elbow and flange, Exhaust silencer, etc.
Documents	Electric drawing, operation & maintenance manual, certification etc.

### III. OPTIONAL CONFIGURATION

Engine Accessories	◇ Heavy-duty air filter ◇ Coolant heater ◇ Lub oil heater ◇ Fuel and Water Separator
Alternator And Accessories	◇ Stamford ◇ Leroy Somer ◇ Marathon ◇ Anti condensation heater ◇ PMG
	◇ High voltage _____ kV
Cooling System	◇ 50°C radiator ◇ Heat exchanger + water cooling tower + External water circulation pumping system
	◇ Remote horizontal water tank system
Control System	◇ AMF ◇ Parallel ◇ Practical type in low temperature environment ◇ Control Screen Heater
	◇ Other (Comap、DEIF)
Circuit Breaker	◇ 3/4 poles ◇ Fixed/handcart type ◇ Electric mechanism
Automatic Transfer Swtich	◇ ATS cabinet
Start Battery	◇ Nickel-cadmium battery ◇ Maintenance-free battery ◇ Power charger and selector
	◇ Charging current meter
External Fuel Tank	◇ 500L ◇ 1000L ◇ 1500L ◇ 2000L ◇ 2500L ◇ 3000L ◇ 4000L ◇ 5000L
Others	_____

### IV. ENGINE DATA

Engine Model	MTA11-G2	Engine Power	246	kW
Aspiration	Turbocharged & Aftercooled	Displacement	10.8	L
Type	In-line	Bore×Stroke	125×147	mm
No. of Cylinders	6	Compression Ratio	16.1:1	
Governor Type	Electronic Governor	Rated Speed	1500	RPM

#### ■ Fuel System

Prime Power Fuel Consumption	51.6	L/h	Standby Power Fuel Consumption	56.2	L/h
Fuel #	ASTM D975 No.2-D or BS2869 1998 Class A1, A2		Injection System	PT	

#### ■ Lubrication System

Lub Oil Capacity	36.7	L			
Lub #	API CF-4 15W40		Max.Temperature	121	°C

#### ■ Coolant System

Coolant Capacity	55.4	L	Max. Top Tank Temp.	104	°C
Std. Thermostat (Modulating) Range	82-94	°C	Fan Drive Method	Shaft drive	
Cooling Fan Air Flow	420	m3/min			

#### ■ Air Intake System

Combustion Air Flow	15.78/16.8	m3/min	Maximum Air Intake Restriction	2.5	kPa
---------------------	------------	--------	--------------------------------	-----	-----

#### ■ Exhaust System

Exhaust Gas Flow	39.48/42.42	m3/min	Max.Back Pressure	10	kPa
Exhaust Gas Temp	≤518	°C	Exhaust Pipe Size	φ150	mm

#### ■ Starting System

Start Mode	DC24V Electric start	Battery	2x150	Ah
------------	----------------------	---------	-------	----

### V. ALTERNATOR DATA

Alternator Model	SLG274K	Rate Power	200/250	kW/kVA
PF.	0.8	Voltage	400/230	V
Phase	3	Frequency	50	Hz
Connection	3P 4W/Y	Bearing	1	
Winding Pitch	2/3	Protection Class	IP23	
Insulation Class	H	Efficiency	92%	
Tel. Influence	TIF: <50	Voltage Regulation	±1.0%	
Harmonic Coefficient	THF: <2%	AVR	AS440	
Voltage Adjust Scope	≥±5%	Excitation System	Self Excited	

### VI. CONTROL SYSTEM DATA

### MODEL DSE6120

#### ■ Main feature

Electronic J1939 (CAN) and nonelectronic MPU and alternator sensing engine support for diesel, gas and petrol engines all in one variant. With a number of flexible inputs, outputs and protections, the modules can be easily adapted to suit a wide range of applications.



DSE6120 MKIII

#### ■ Key Function

- ▲Utility voltage sensing
- ▲Generator/load power monitoring (kW, kV A, kV Ar, pf)
- ▲Generator overload protection(kW)
- ▲Efficient power save mode
- ▲mains and generator closed via front panel
- ▲4 configurable DC outputs
- ▲4 configurable analog./digital inputs
- ▲6 configurable digital inputs
- ▲Support for 0-10 V & 4-20 mA Oil pressure sensors
- ▲Configurable staged loading outputs
- ▲CAN, MPU and alternator speed sensing in one variant
- ▲3 engine maintenance alarms
- ▲Engine speed protection
- ▲Engine pre-heat
- ▲Multiple date and time scheduler
- ▲Engine idle control for starting & stopping
- ▲Fuel pump control
- ▲Battery voltage monitoring
- ▲Start on low battery voltage
- ▲Configurable remote start input
- ▲Alternative configuration
- ▲Alarm including common alarm, common electric and common shutdown
- ▲LCD and LED alarm indication
- ▲Configurable event log (50)
- ▲Heated display option available

☆ *For more information, please visit the [official website](#).*

### VII. WARRANTY POLICY

1. Guarantee for one year or 1000 hours (accord to whichever reach first) from ex-factory date. Refer to 《YANAN Diesel Generator Warranty Manual》 for more details.
2. Wearing parts( filters), incorrect man-made operation, maintenance failures are excluded from the warranty policy

### VIII. DRAWING (for illustration purposes only)

