


MG POWER DIESEL GENERATOR Cummins® powered Genset Model:MGC 600

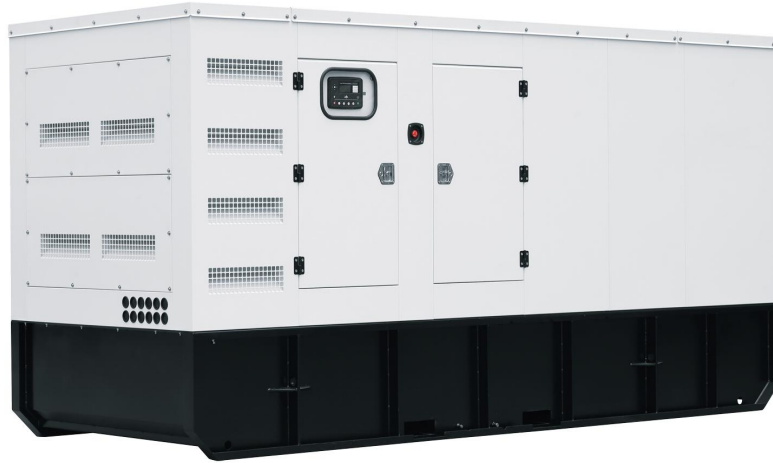

*Drawing above for illustration purposes only

I . GENERAL DATA

Prime Power	kW/kVA	600	750
Standby Power	kW/kVA	660	825
Frequency	Hz/rpm	50	1500
Voltage	V	400	230
Current	A	1083	
Connection	/	3P 4W/Y	
Rated Power Factor	/	0.8	
Open Type (L×W×H)	mm	4400×1850×2380	
Open Type(Weight)	kg	6900	
Silent Type (L×W×H)	mm	5800×2250×2580	
Silent Type(Weight)	kg	8400	



■ Available for voltages 400/230V, 480/277V, 380/220V, 440/254V, 416/240V, 220/127V, 208/120V

■ All datas based on ISO 3046, altitude 100m (328ft), barometric pressure 100kPa (29.53inHg), air temperature 25°C (77°F), relative humidity 30%.

■ Please contact with YANAN engineer for correct generator capacity selection when the load application can't meet with the standard reference.

■ YANAN diesel generators comply with standards:ISO8528,ISO14000,ISO3046,GB755,BS5000,VDE0530,IEC34-1

II. STANDARD CONFIGURATION

Engine	Cummins, including air filters, fuel filters, oil filter, starting motor and charging alternator etc.
Alternator	YANAN brushless AC alternator
Radiator	Silent Type 50°C (Open Type 40°C) , fan protective shroud
Base Frame	≤550KW: base mounted fuel tank, anti-vibration pads, battery holder
	>550KW: channel steel base frame, anti-vibration pads, battery holder
Circuit Breaker	≤63A: Micro Circuit Breaker (MCB) >63A ≤1250A : Molded case circuit breaker(MCCB) , >1250A: Air circuit breaker(ACB)
Control System	DEEP SEA 6120
Start Battery	Dry charged battery, available for 6 times starts under standard condition; connection cables.
Installation Accessories	Bellow, Elbow and flange, Exhaust silencer, etc.
Documents	Electric drawing, operation & maintenance manual, certification etc.

III. OPTIONAL CONFIGURATION

Engine Accessories	◇Heavy-duty air filter ◇Coolant heater ◇Lub oil heater ◇Fuel and Water Separator
Alternator And Accessories	◇Stamford ◇Leroy Somer ◇Marathon ◇Anti condensation heater ◇PMG
	◇High voltage ____kV
Cooling System	◇50°C radiator ◇Heat exchanger + water cooling tower + External water circulation pumping system
	◇Remote horizontal water tank system
Control System	◇AMF ◇Parallel ◇Practical type in low temperature environment ◇Control Screen Heater
	◇Other (Comap、DEIF)
Circuit Breaker	◇3/4 poles ◇Fixed/handcart type ◇Electric mechanism
Automatic Transfer Swtich	◇ATS cabinet
Start Battery	◇Nickel-cadmium battery ◇Maintenance-free battery ◇Power charger and selector
	◇Charging current meter
External Fuel Tank	◇500L ◇1000L ◇1500L ◇2000L ◇2500L ◇3000L ◇4000L ◇5000L
Others	_____

IV. ENGINE DATA

Engine Model	KTA38-G2	Engine Power	731	kW
Aspiration	Turbocharged , Atercooled	Displacement	38	L
Type	60° Vee	Bore×Stroke	159×159	mm
No. of Cylinders	12	Compression Ratio	14.5:1	
Governor Type	Electronic Governor	Rated Speed	1500	RPM

■ Fuel System

Prime Power Fuel Consumption	167	L/h	Standby Power Fuel Consumption	183	L/h
Fuel #	ASTM D975 No.2-D or BS2869 1998 Class A1, A2		Injection System	PT	

■ Lubrication System

Lub Oil Capacity	135.1	L			
Lub #	API CF-4 15W40		Max.Temperature	121	°C

■ Coolant System

Coolant Capacity	231.8	L	Max. Top Tank Temp.	104	°C
Std. Thermostat (Modulating) Range	82-93	°C	Fan Drive Method	Shaft drive	
Cooling Fan Air Flow	1140	m3/min			

■ Air Intake System

Combustion Air Flow	51/55.2	m3/min	Maximum Air Intake Restriction	3.7	kPa
---------------------	---------	--------	--------------------------------	-----	-----

■ Exhaust System

Exhaust Gas Flow	143.9/158.0	m3/min	Max.Back Pressure	10	kPa
Exhaust Gas Temp	≤552	°C	Exhaust Pipe Size	φ 150×2	mm

■ Starting System

Start Mode	DC24V Electric start	Battery	4x200	Ah	
------------	----------------------	---------	-------	----	--

V. ALTERNATOR DATA

Alternator Model	SLG404G	Rate Power	648/810	kW/kVA
PF.	0.8	Voltage	400/230	V
Phase	3	Frequency	50	Hz
Connection	3P 4W/Y	Bearing	1	
Winding Pitch	2/3	Proteccion Class	IP23	
Insulation Class	H	Efficiency	93.4%	
Tel. Influence	TIF: <50	Voltage Regulation	±0.5%	
Harmonic Coefficient	THF: <2%	AVR	MX321	
Voltage Adjust Scope	≥±5%	Excitation System	PMG	

VI. CONTROL SYSTEM DATA

MODEL DSE6120

■ Main feature

Electronic J1939 (CAN) and nonelectronic MPU and alternator sensing engine support for diesel, gas and petrol engines all in one variant.

With a number of flexible inputs, outputs and protections, the modules can be easily adapted to suit a wide range of applications.

■ Key Function

- | | | |
|--|---|--|
| ▲Utility voltage sensing | ▲Configurable staged loading outputs | ▲Configurable remote start input |
| ▲Generator/load power monitoring (kW, kV A, kV Ar, pf) | ▲CAN, MPU and alternator speed sensing in one variant | ▲Alternative configuration |
| ▲Generator overload protection(kW) | ▲3 engine maintenance alarms | ▲Alarm including common alarm, common electric and common shutdown |
| ▲Efficient power save mode | ▲Engine speed protection | ▲LCD and LED alarm indication |
| ▲mains and generator closed via front panel | ▲Engine pre-heat | ▲Configurable event log (50) |
| ▲4 configurable DC outputs | ▲Multiple date and time scheduler | ▲Heated display option available |
| ▲4 configurable analog./digital inputs | ▲Engine idle control for starting & stopping | ☆ <i>For more information, please visit the official website</i> |
| ▲6 configurable digital inputs | ▲Fuel pump control | |
| ▲Support for 0-10 V & 4-20 mA oil pressure sensors | ▲Battery voltage monitoring | |
| | ▲Start on low battery voltage | |



DSE6120 MKIII

VII. WARRANTY POLICY

1. Guarantee for one year or 1000 hours (accord to whichever reach first) from ex-factory date. Refer to 《YANAN Diesel Generator Warranty Manual》 for more details.
2. Wearing parts (filters), incorrect man-made operation, maintenance failures are excluded from the warranty policy

VIII. DRAWING (for illustration purposes only)

